
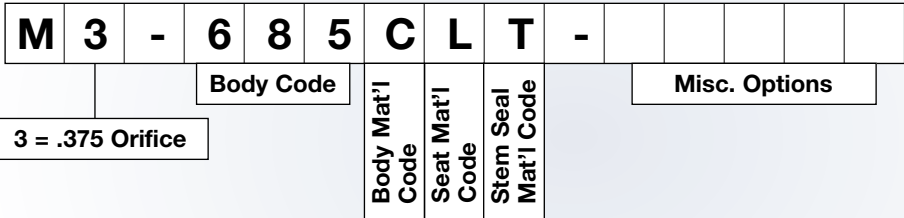


# MANIFOLDS

## 2 Valve Block Manifolds - 90° Angle and Straight Style

**Standard Direct-Mount®**  
(1/2" [12.70] auxiliary taps)

**Compact Direct-Mount®**  
(3/8" [9.52] auxiliary taps)

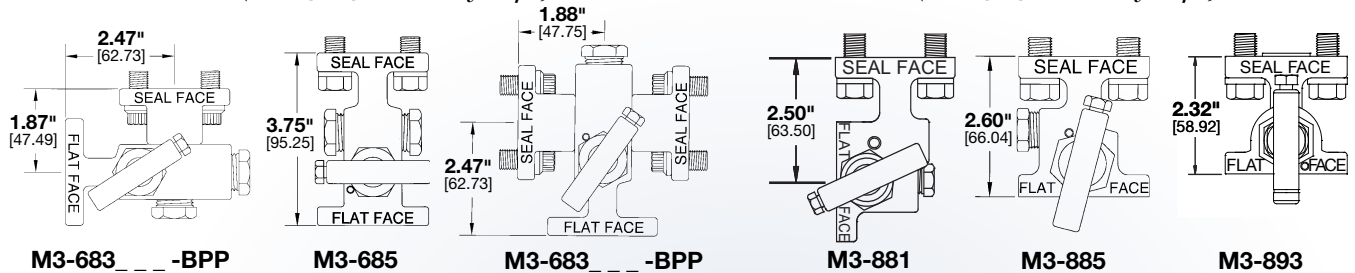

PART NUMBER	STANDARD		
M3-685CLT	Straight Style	Carbon Steel w/CS Bolts	5.50 lbs.
M3-685SLT	Straight Style	316 SS w/CS Bolts	5.50 lbs.
M3-683CLT-BPP	90° Style	Carbon Steel w/CS Bolts	8.90 lbs.
M3-683SLT-BPP	90° Style	316 SS w/CS Bolts	8.90 lbs.
M3-683CLT-BPB	Christmas Tree	Carbon Steel w/CS Bolts	8.90 lbs.
M3-683SLT-BPB	Christmas Tree	316 SS w/CS Bolts	8.90 lbs.
PART NUMBER	COMPACT		
M3-885CLT	Straight Style	Carbon Steel w/CS Bolts	5.26 lbs.
M3-885SLT	Straight Style	316 SS w/CS Bolts	5.26 lbs.
M3-881CLT	90° Style	Carbon Steel w/CS Bolts	6.70 lbs.
M3-881SLT	90° Style	316 SS w/CS Bolts	6.70 lbs.
M3-893SLT	Straight Style Pair	316 SS w/CS Bolts	3.50 lbs.
M3-893TLT	Straight Style Pair	Ductile Iron w/CS Bolts	3.50 lbs.
OPTION CODE	DESCRIPTION		
<b>SEAT MATERIAL OPTIONS - See Pressure and Temperature Charts on Page 3</b>			
L	Rylon (Standard)		
D	Delrin®		
K	KEL-F®		
P	PEEK®		
T	Teflon®		
<b>STEM SEAL MATERIAL OPTIONS - See Pressure and Temperature Charts on Page 3</b>			
T	Patented Teflon® Pressure-Core® (Standard)		
J	Patented Teflon® Pressure-Core® (Low Temp)		
P	Teflon® Packed Style		
V	Viton® O-Ring		
<b>MISCELLANEOUS OPTIONS</b>			
MH	Viton® O-Ring Flange Seals (TFE Standard)		
W9	316 SS Bolts (CS Standard)		
XL	Clean for Critical Service (Oxygen and Chlorine)		