
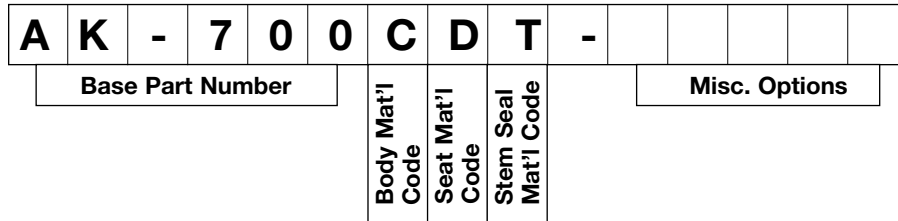


ADAPTERS

ΔP to Static and Static Adapters

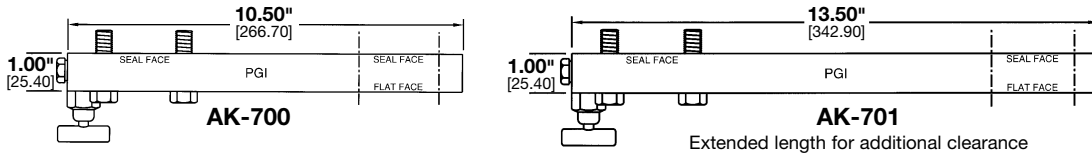

PART NUMBER	TEFZEL® SOFT SEAT & TEFLON® PRESSURE-CORE® STEM SEAL			
AK-700CDT	Standard Length	10-1/2" [266.70]	Carbon Steel/No Bolts	7.5 lbs.
AK-700SDT	Standard Length	10-1/2" [266.70]	316 SS/No Bolts	7.5 lbs.
AK-701CDT	Extended Length	13-1/2" [342.90]	Carbon Steel/No Bolts	9.6 lbs.
AK-701SDT	Extended Length	13-1/2" [342.90]	316 SS/No Bolts	9.6 lbs.
OPTION CODE		DESCRIPTION		
SEAT MATERIAL OPTIONS – See Pressure and Temperature Charts on Page 3				
D	Delrin® (Standard)			
K	KEL-F®			
P	PEEK®			
T	Teflon®			
STEM SEAL MATERIAL OPTIONS – See Pressure and Temperature Charts on Page 3				
T	Patented Teflon® Pressure-Core® (Standard)			
J	Patented Teflon® Pressure-Core® (Low Temp)			
MISCELLANEOUS OPTIONS				
MH	Viton® O-Ring Flange Seals (TFE Standard)			
BOLT SELECTION <i>Static Transmitter Side</i>				
WB 1-1/2"	When using Traditional Flange Transmitters (i.e. Rosemount 1151, Honeywell 900, etc.) When using NPT Static Transmitters AK-055 or AK-056 NPT Adapter (see below)			
WD 2-3/4"	When using Rosemount 3051C or 3051S with Coplanar Flange			
BOLT MATERIAL OPTIONS				
W9	316 Stainless Steel (CS Standard)			

PART NUMBER	MATERIALS OF CONSTRUCTION	DESCRIPTION
AK-056-C0	ASTM A276-316	1/2" MNPT Required for FNPT Static Transmitter
AK-056-10	ASTM A108-1215	
AK-055-C0	ASTM A276-316	1/2" FNPT Required for MNPT Static Transmitter
AK-055-10	ASTM A108-1215	
1.0 lbs. each		6,000 PSI @ 200° F Max

