Stabilized and Non-Stabilized Connectors

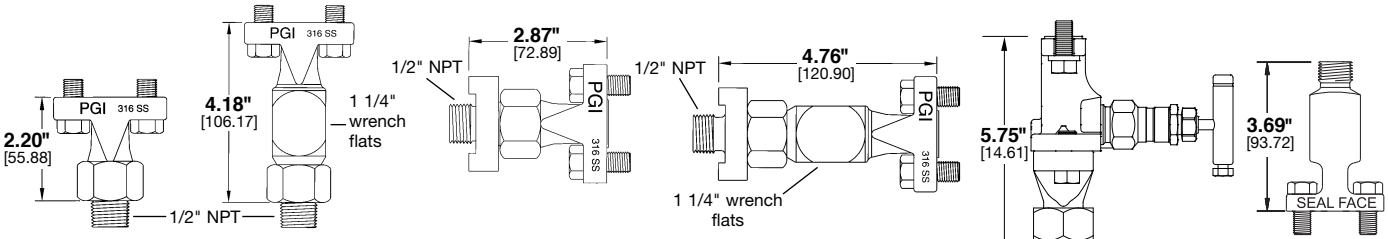

AK-022LDV-C0 **AK-024LDV-C0** **AK-022-C0** **AK-024-C0** **M3-893S6GXVXX** **AK-130**

A	K	-	0	2	4	-	C	0	-					
Base Kit Number										Misc. Options				

KIT NUMBER	STABILIZED CONNECTORS (316 SS w/CS Bolts)	
AK-022LDV-C0	Standard Length Pair, Vertical only (70 lb. Max Wt. Load) *Patented*	4.59 lbs.
AK-024LDV-C0	Extended Length Pair, Vertical only (70 lb. Max Wt. Load) *Patented*	4.65 lbs.
AK-022-C0	Standard Length Pair (150 ft./lbs.) *Patented*	4.47 lbs.
AK-024-C0	Extended Length Pair (150 ft./lbs.) *Patented*	4.86 lbs.
M3-893S6GXVXX	Half Block Manifold with a Stabilized Connector (Combine with Grafoil® Seals For a Compact Fire Proof Roddable Root Valve)	8.00 lbs.
KIT NUMBER	**NON-STABILIZED CONNECTORS**	
AK-130-10-PAIR	Carbon Steel w/CS Bolts	
AK-130-C0-PAIR	316 SS w/CS Bolts	
KIT NUMBER	**INSTALLATION TOOL**	
AK-039-TT	Installation Tool for AK-022 Connectors (See Below)	
KIT NUMBER	**DESCRIPTION**	
	MISCELLANEOUS OPTIONS	
MN	Dielectric Isolation (See Below)	
M9	Adapter required when using orifice plates over 1/4" [6.35] thick (See Below)	
W9	316 SS Bolts (CS Standard)	

Dielectric Isolators

MN Option



Rating: 2500 VDC
Resistance: 5 MegOhms

2 3/8" to 2 1/2" Spacing Adapters

M9 Option



2 3/8" - 2 1/2"
[60.32-63.50]
Spacing Adapter

Installation Tool for AK-022 Connectors
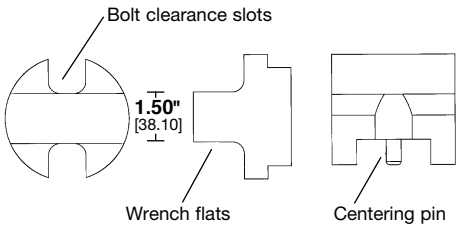
AK-039-TT